

LED Tube Light Model: ETL-T8-3S Series

Input Voltage: AC 120-280V 50/60Hz


ETL & CETL Listed

Available Sizes: 2', 4', 5' and 8'

Job Name
Catalog#
Notes
Fixture Type

Features

- Power: 10W - 36W
- Average Rated Life: 50,000 Hrs.
- Input: AC 120-280V 50/60Hz
- LED Efficacy: 85 – 100 Lm/W
- Power Factor: 0.90 - 0.99
- Color temperature options: 3000K - 7500K
- Pin type: G13
- Len options: Clear, Striped or Frosted
- Ballast free
- No RF interference, no noise, no flickering
- Quick and easy installation to minimize retrofit cost

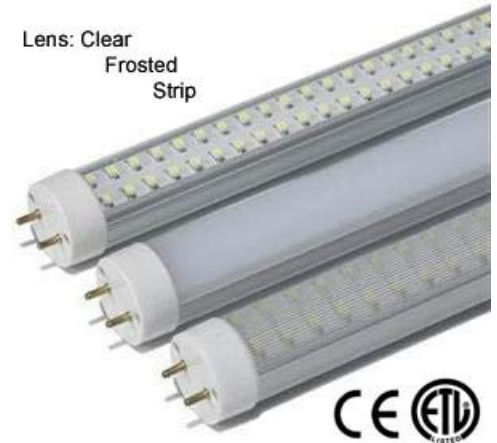


Available Models and Specifications				AC120-280V 50/60Hz		
Product#	Size	Power	SMD Qty	Lens	Luminous	Efficacy
ETL-T8-3S-2-10W	2'	10W	144	Clear	900Lm	90 Lm/W
				Striped	850Lm	85 Lm/W
				Frosted	750Lm	75 Lm/W
ETL-T8-3S-4-15W	4'	15W	240	Clear	1500Lm	100 Lm/W
				Striped	1400Lm	93 Lm/W
				Frosted	1200Lm	80 Lm/W
ETL-T8-3S-4-18W	4'	18W	288	Clear	1800Lm	100 Lm/W
				Striped	1700Lm	94 Lm/W
				Frosted	1450Lm	81 Lm/W
ETL-T8-3S-4-20W	4'	20W	312	Clear	1900Lm	95 Lm/W
				Striped	1800Lm	90 Lm/W
				Frosted	1550Lm	78 Lm/W
ETL-T8-3S-5-15W	5'	15W	288	Clear	1500Lm	100 Lm/W
				Striped	1400Lm	93 Lm/W
				Frosted	1200Lm	80 Lm/W
ETL-T8-3S-8-36W 1-Pin (FA8)	8'	36W	576	Clear	3400Lm	94 Lm/W
				Striped	3100Lm	86 Lm/W
				Frosted	2800Lm	78 Lm/W



Install LED Tube Light to Fluorescent Light Fixture

For Inductive Ballast

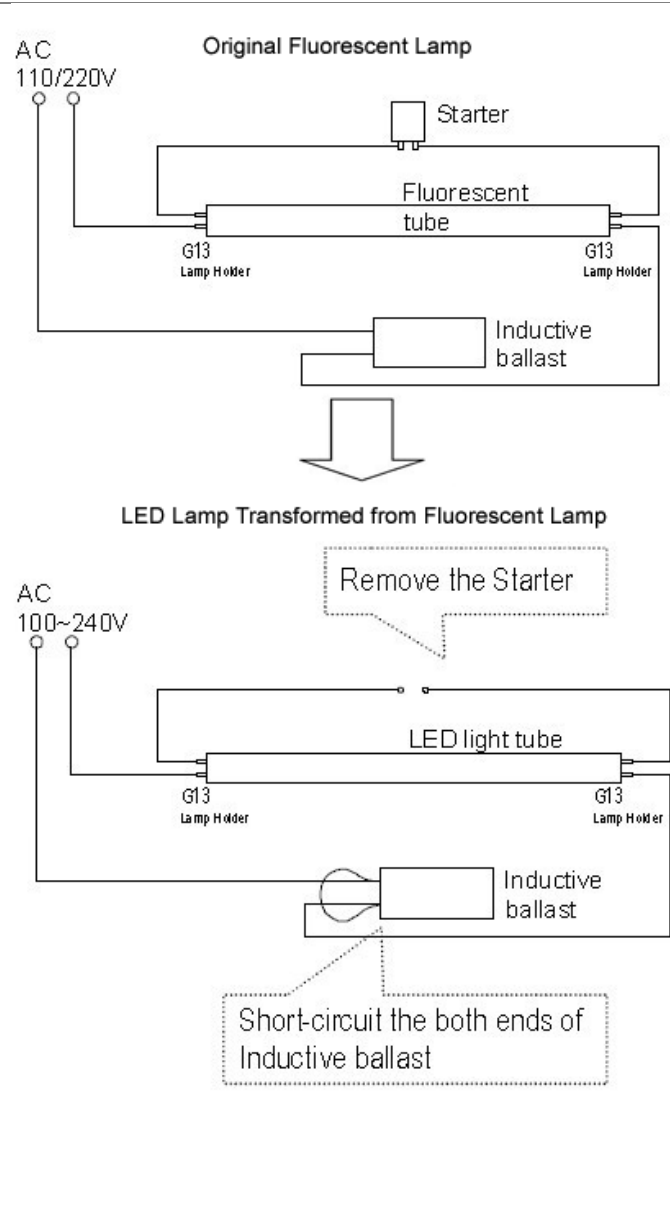

For Electronic Ballast

